



TREK 603

High voltage power amplifier/piezo driver for precise control of output voltages in customer specified bipolar or unipolar ranges within available ranges.



The Trek® 603 is a high-voltage DC power amplifier/piezo driver designed to provide precise control of output voltages in bipolar or unipolar ranges that are customer specified within a range of available settings. The instrument achieves the accurate output responses and high slew rates demanded by reactive loads by utilizing a four-quadrant active output stage that sinks or sources current into reactive or resistive loads. The Trek 603 is configured as a non-inverting amplifier and is available in single or dual channel packaging that are operable on a bench top or in a 19 in rack.

PRODUCT HIGHLIGHTS

- Four-quadrant output for driving capacitive loads
- Up to two independent amplifier channels in one enclosure
- Short-circuit protected for equipment protection
- Reprogrammable factory-set output configurations
- All solid-state design for maintenance free operation
- Low output noise for ultra-accurate outputs
- NIST-traceable Certificate of Calibration provided with each unit

TYPICAL APPLICATIONS

- Driving piezoelectric actuators
- Modulating electrooptics
- Electrostatically controlling ion beams
- Providing remote ON/OFF capabilities for automated or computer controlled systems

AT A GLANCE

Available Voltage Ranges

0 to ± 125 VDC or peak AC
 0 to -250 VDC or peak AC
 0 to $+250$ VDC or peak AC

Output Current Range

0 to ± 40 mA DC or ± 80 mA peak
 AC for less than 1 ms

Slew Rate

Greater than 100 V/ μ s

Large Signal Bandwidth (5%)

DC to greater than 150 kHz

DC Voltage Gain

50 V/V or 25 V/V

TREK 603 HIGH VOLTAGE POWER AMPLIFIER

TECHNICAL DATA

| Performance Specifications | | |
|---------------------------------|---|---|
| Available Output Voltage Ranges | 0 to ± 125 VDC or peak AC | |
| | 0 to -250 VDC or peak AC | |
| | 0 to +250 VDC or peak AC | |
| Output Current | ± 40 mA DC or ± 80 mA peak AC, for less than 1 ms | |
| DC Voltage Gain | 50 V/V (a gain of 25 V/V is available) | |
| DC Voltage Gain Accuracy | Better than 0.1% of full scale | |
| DC Offset Voltage | Less than 500 mV | |
| Output Noise | Less than 20 V rms ¹ | |
| Slew Rate | Greater than 100 V/ μ s (10% to 90%, typical) | |
| Large Signal Bandwidth | DC to greater than 150 kHz (5% distortion) | |
| Stability | Drift with Time: Less than 100 ppm/hr, noncumulative | Drift with Temp: Less than 25 ppm/ $^{\circ}$ C |

| Amplifier Input | |
|---------------------|--|
| Input Voltage Range | 0 to ± 10 V DC or peak AC, non-inverting |
| Input Impedance | 10 k Ω , nominal |

| Voltage Monitor Specifications | |
|--------------------------------|--|
| Ratio | 1/25th of the high voltage output |
| DC Accuracy | Better than 0.1% of full scale |
| AC Accuracy | Calibrated using a Ross Model VD30-4.1-BDKC-ALU high voltage divider |
| DC Offset Voltage | Less than 5 mV |
| Output Noise | Less than 5 mV rms ¹ |
| Output Impedance | 0.1 Ω |

| Current Monitor Specifications | |
|--------------------------------|----------------------------------|
| Ratio | 0.1 V/mA |
| DC Accuracy | Greater than 1% of full scale |
| Offset Voltage | Less than 10 mV |
| Output Noise | Less than 10 mV rms ¹ |
| Output Impedance | 0.1 Ω |

| Mechanical Specifications | | |
|---------------------------|--|--|
| Dimensions (H x W x D) | Single Channel Instrument | 222.3 x 108 x 381 mm (8.75 x 4.25 x 15 in) |
| | Double Channel Instrument | 433.8 x 108 x 335 mm (17 x 4.25 x 15 in) |
| Weight | Single Channel Instrument | 4.3 kg (9.4 lb) |
| | Double Channel Instrument | 8.6 kg (18.8 lb) |
| HV Connector | SHV High Voltage Connector | |
| BNC Connectors | Power Switch, Amplifier Input, Voltage Monitor, Current Monitor, High Voltage ON/OFF, Digital Enable | |

¹ Measured using the true rms feature of the HP Model 34401A digital multimeter

TECHNICAL DATA

Electrical Specifications

| | |
|--------------------|--|
| Line Voltage | Factory set for one of two ranges: 104 to 127 VAC or 180 to 250 VAC at 48 to 63 Hz |
| AC Line Receptacle | Standard three-prong with integral fuse holder |
| Power Consumption | 125 VA, maximum |
| HV Cable | 2 m, 66 pF per foot |

Environmental Specifications

| | |
|-------------------|-----------------------------|
| Temperature | 0 to 40°C (32 to 104°F) |
| Relative Humidity | To 85%, noncondensing |
| Altitude | To 2000 meters (6561.68 ft) |

Features

| | |
|-------------------------------|---|
| Output Voltage Configurations | Factory set for 0 to ± 125 VDC or peak AC. Other ranges available. |
| Digital Enable | An input providing a connection for a TTL compatible signal to turn on and off the high voltage output. |
| Load Range Switch | Slide switch to select high or low capacitive loads (more than 150 pF or less than 150 pF) |
| Dynamic Adjustment | Graduated one-turn panel potentiometer is used to optimize the AC response for various load parameters. |

REFERENCE NUMBERS

Included Accessories


| PN | Description |
|-------|---|
| 23166 | Operator's Manual |
| 43874 | HV Output Cable |
| N5002 | Line Cord Spare Fuses (selected per geographic destination) |

Optional Accessories

| PN | Description |
|---------|--------------------------------------|
| 603RA | 19 in Rack Mount Kit |
| 604RA | Full Rack Mount Kit (3.5 in Buckeye) |
| 603RA-2 | Dual Instrument Rack Kit |



MODEL 603

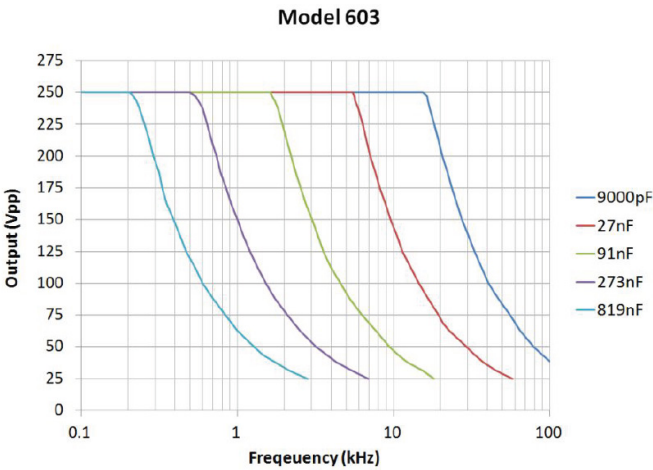

For international contact information,
visit advancedenergy.com.

sales.support@aei.com
+1 970 221 0108

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, Trek®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.