



RADIATION ALERT[®] Ranger EXP

$\alpha \beta \gamma x$

The Ranger EXP offers maximum performance in a lightweight, rugged solution for using your survey meter in the field. The small, handheld unit offers excellent sensitivity to low levels of alpha, beta, gamma, and x-rays. The digital readout is displayed with a red count light and a beeper sounds with each count detected. Other features include an adjustable timer, selectable alert.



Free Observer USB Software
Free Observer BLE Software For Use With The
Optional Bluetooth Module

Detector

RAP-RS2 Probe - External Halogen-quenched, uncompensated GM tube with thin mica window, 1.4-2.0 mg/cm² areal density. Effective diameter of window is 45 mm (1.75 in.).

Operating Range

mR/hr - .001 to 100 CPM - 0 to 350,000
µSv/hr - .01 to 1000 CPS - 0 to 5,000
Timed Count - 1 to 9,999K (9,999,000) counts

Energy Sensitivity

3340 CPM/mR/hr referenced to Cs137

- Detects Alpha down to 2 MeV.
- Detects Beta down to .16 MeV; typical detection efficiency at 1 MeV is approx. 25%.
- Detects Gamma down to 10 KeV through the tube window.
- Smallest detectable level for I125 is .02 µCi at contact.

Built-In Efficiencies

³⁵Sulfur (S35), ⁹⁰Strontium (Sr/y90), ¹³⁷Cesium (Cs137), ³²Phosphorus (P32), ¹⁴Carbon (C14), ¹³¹Iodine (I131), ⁶⁰Cobalt (Co60), and Alpha

Accuracy


(Referenced to Cs137) Typically ±15% from factory, ±10% with NIST Source Calibration

Display

Graphic LCD with Backlight

Alert Set Range

mR/hr .001 - 100 and CPM 1 - 350,000

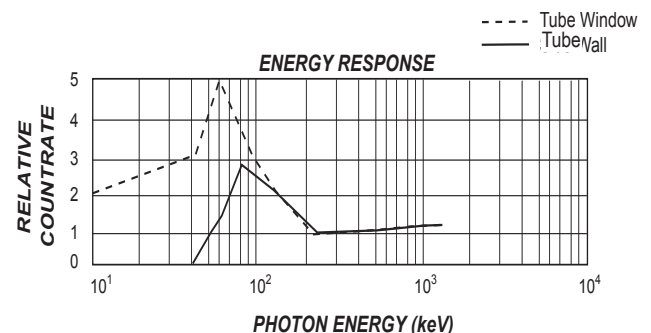

S.E. INTERNATIONAL, INC.

excellence in radiation detection - $\alpha \beta \gamma x$

RADIATION ALERT[®]

1.931.964.3561

www.seintl.com

radiationinfo@seintl.com





RADIATION ALERT[®] *RangerEXP*

Count Light

Red LED flashes with each radiation event

Audio Indicator

Internally mounted beeper. 70db @ 1m.
(Can be switched off for silent operation.)

Size

140 X 68 X 33 mm (5.5 X 2.7 X 1.3 in.)
Probe: 260 X 70 X 25 mm (10.25 X 2.75 X 1 in)

Outputs

USB and Bluetooth 4.1 (Optional) with included
Observer Software Family for PC and Android OS.

Anti-Saturation

Meter will hold at full scale in fields as high as 100
times the maximum reading.

Power Requirements

Two AA alkaline batteries. Approx. 800 hrs @
background.

Temperature Range

-10° to +50°C (14° to 122°F)

Includes

RAP-RS2 External GM Probe, 3ft BNC Cable,
Carrying Case, Xtreme Boot, Stand, Batteries, Mini-
USB Cable, Observer USB Software Download ,
Certificate of Conformance

Options

NIST Calibration

**Bluetooth module available for use with Obsever
BLE software and Rad Responder**

Limited Warranty

1 year limited warranty



S.E. INTERNATIONAL, INC.
excellence in radiation detection - α β γ x
RADIATION ALERT[®]

1.931.964.3561

www.seintl.com

radiationinfo@seintl.com

